

PIXY

"Pixy" is a collection that celebrates transparency and the play of reflections. Its eight shades offer a universe of nuances, where each piece captures and transforms the atmosphere in a unique way.


The collection encourages exploring combinations that bring depth, subtlety and a contemporary character, creating spaces that seem to vibrate with movement and harmony.

A language of shapes and reflections that turns every surface into a visual experience.

"Pixy" es una colección que celebra la transparencia y el juego de reflejos. Sus ocho tonos ofrecen un universo de matices, donde cada pieza captura y transforma el ambiente de manera única.

La colección invita a explorar combinaciones que aportan profundidad, sutileza y un carácter contemporáneo, creando espacios que parecen vibrar con movimiento y armonía.

Un lenguaje de formas y reflejos que convierte cada superficie en una experiencia visual.



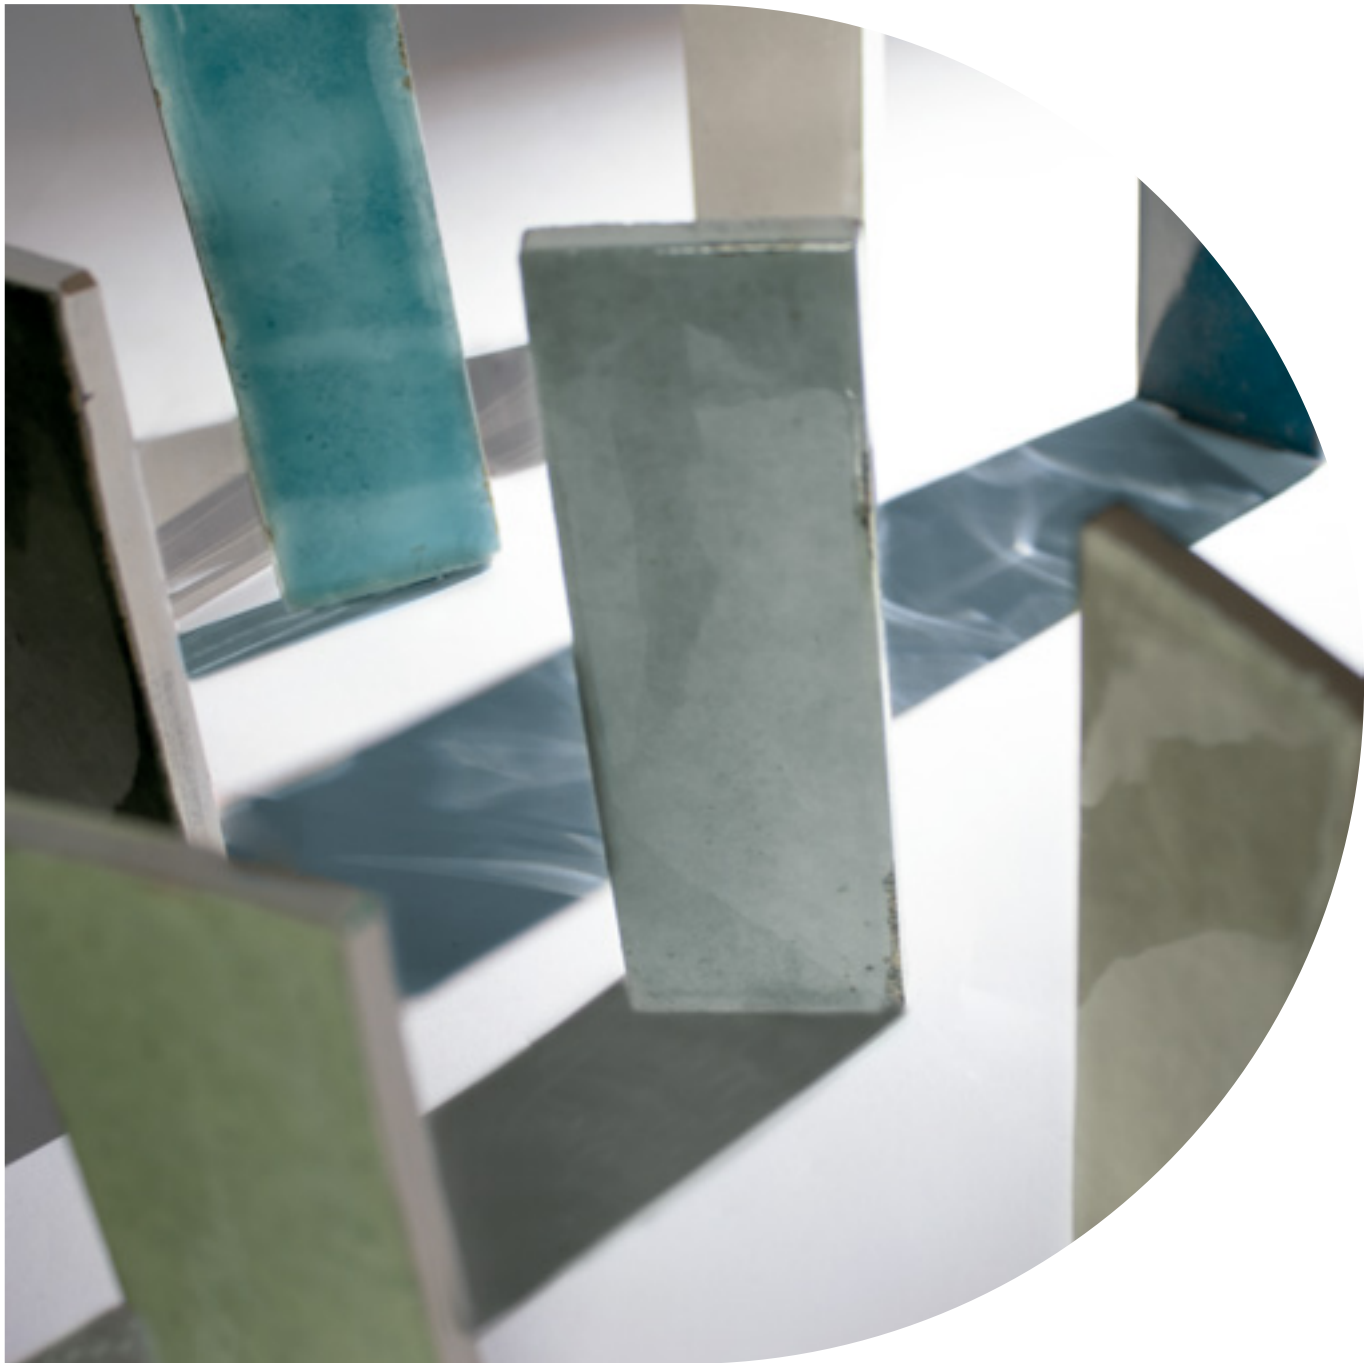


COLLECTION SUMMARY	pag. 5
RESUMEN DE LA COLECCIÓN	
APPLICATIONS	pag. 5
USOS	
GET INSPIRED	pag. 6
INSPIRATE	
TECHNICAL DRAWINGS	pag. 28
DIBUJOS TÉCNICOS	
LAYOUTS	pag. 28
COLOCACIONES	
TECHNICAL FEATURES	pag. 29
CARACTERÍSTICAS TÉCNICAS	
PRICE CODE	pag. 30
CÓDIGO DE TARIFA	
PACKING	pag. 30
RECOMENDATIONS	pag. 31
RECOMENDACIONES	



Collection summary - Resumen de la colección

PIXY 5x15 cm / 2"x6" P \$ D31

			
Antique	Mushroom	Silver	Graphite
			
Jade	Evergreen	Aqua	Deep Blue

PIXY ROUNDED EDGE 1,1x15 cm / 0.43"x6" W \$ DS2



* Available in all Pixy colours.
* Disponible en todos los colores Pixy.

Applications - Usos

Indoor / Interior	Outdoor / Exterior	Floor / Pavimento	Wall / Pared	Pool / Piscina	Non-slip / Antislip
					Class 0 <0,42



Pixy Graphite - **Pixy Rounded Edge** Graphite






Pixy Jade



Pixy Evergreen - Pixy Rounded Edge Evergreen

Floor: Square Natural & Chalk (Clay collection)

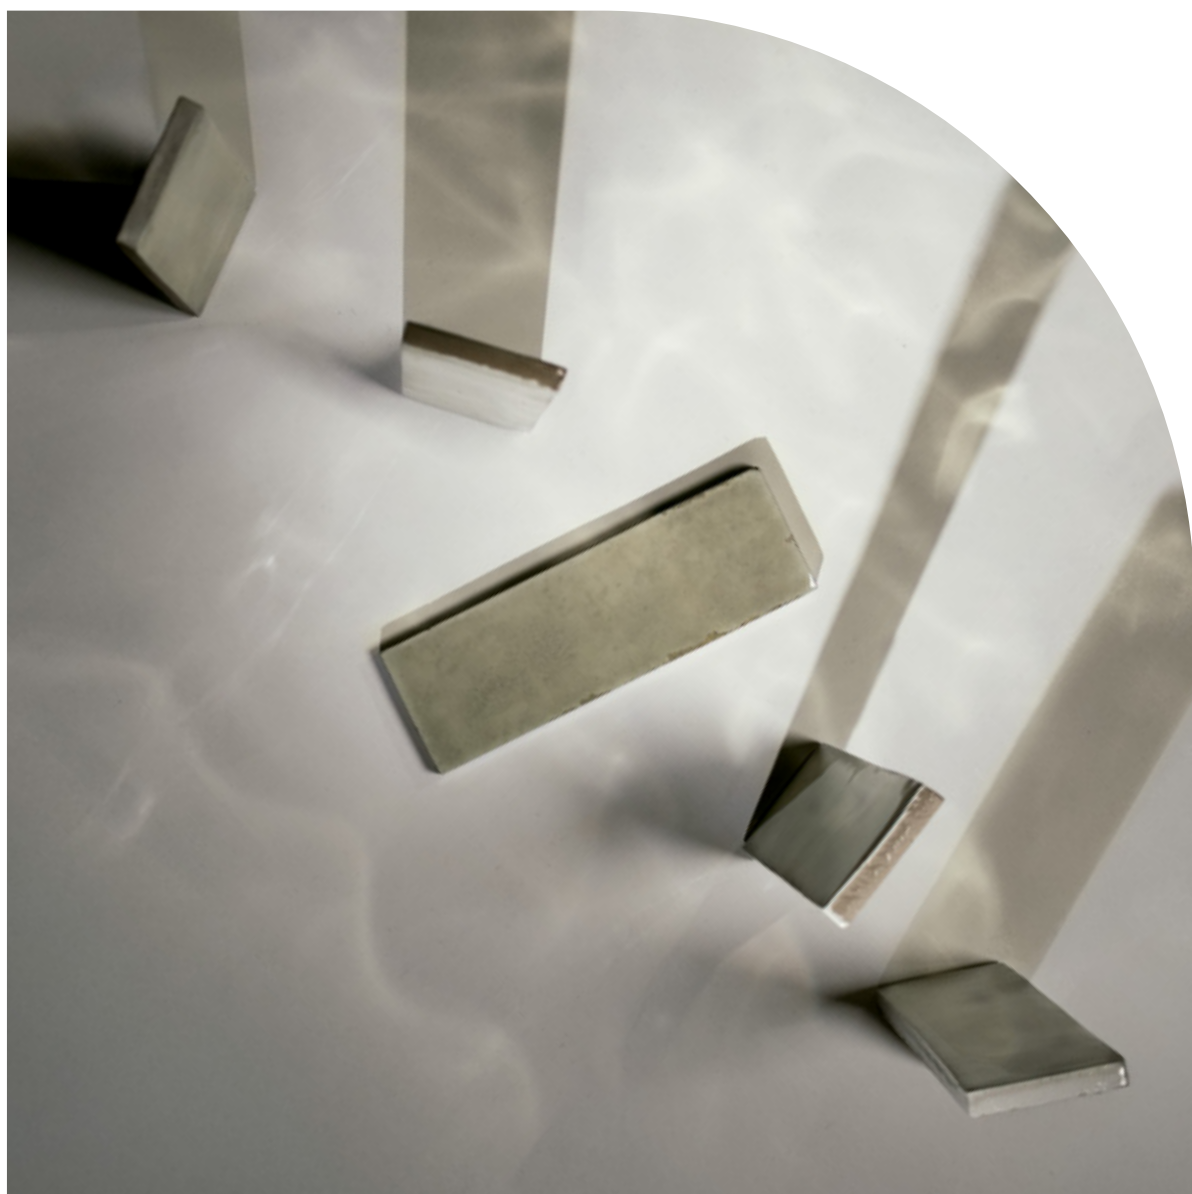



Pixy Silver









Pixy Aqua

Floor & Stairs: Natural & Square Natural (Clay collection)





Pixy Jade



*Door & Table: **Pixy** Antiquie 50% & Silver 50%
Wall: **Pixy** Silver*

Floor: Square Natural (Clay collection)



Pixy Antique & Deep Blue




Pixy Deep Blue - Pixy Rounded Edge Deep Blue

Floor: Graphite (Limestone collection)





Layouts - Colocaciones

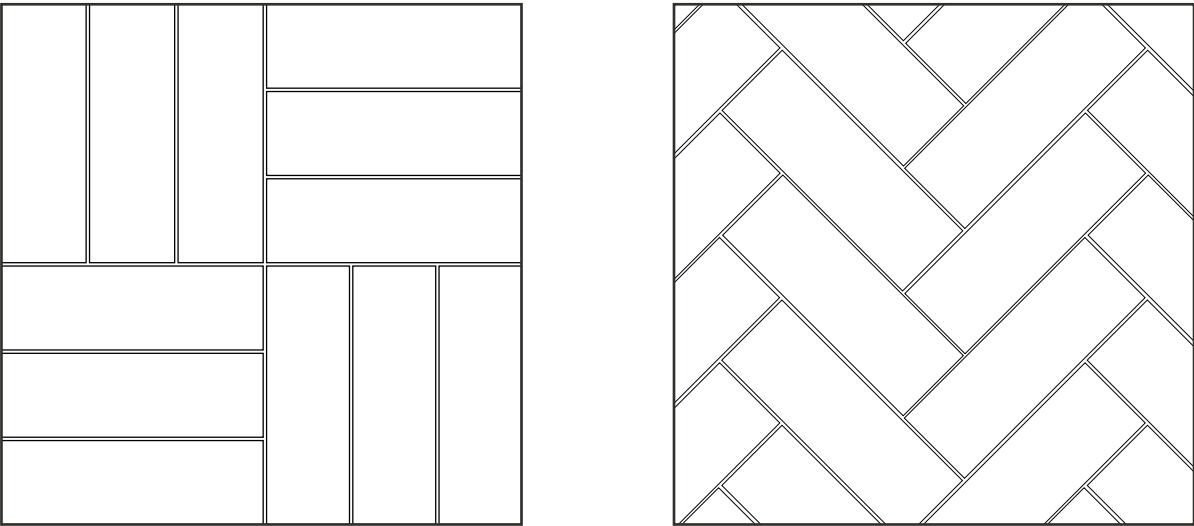

Dry-pressed porcelain tiles with water absorption B la ≤ 0,5% for interior and exterior floors and walls. Baldosas cerámicas prensadas en seco con absorción de agua B la ≤ 0,5% para suelos y paredes interiores y exteriores.			
FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN		NORMA
 Dimensional Features	48 mm +/- 0,5 mm x 148 mm +/- 0,9 mm x 8,5 mm +/- 0,5 mm		UNE-EN ISO 10545-2:2019
 Water absorption	$E_b \leq 0,5\%$		UNE-EN ISO 10545-3:2018
 Modulus of rupture and breaking strength	Minimum 35 N/mm2 < Individual Minimum 32 N/mm2		UNE-EN ISO 10545-4:2019
 Crazing resistance	Pass		UNE-EN ISO 10545-11:1997
 Household products resistance	GA		UNE-EN ISO 10545-13:2017
 Chemical resistance	GHA		UNE-EN ISO 10545-13:2017
 Stain resistance	>3		UNE-EN ISO 10545-14:2015
 Frost resistance	Pass		UNE-EN ISO 10545-11:1997
 Abrasive Resistance	PEI 4: Antique PEI 3: Mushroom, Silver & Jade PEI 2: Aqua, Deep Blue, Evergreen & Graphite		UNE-EN ISO 10545-7:1999
 Tone Variation	V3		-
 Porcelain Body	-		-

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
PIXY	D31
PIXY ROUNDED EDGE	DS2

Packing

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
PIXY	5x15 cm	78	10,62 kg	0,554 m²	75	41,55 m²
PIXY ROUNDED EDGE	1,1x15 cm	20	0,41 kg	2,950 m	429	1265,550 m

			LB 	SQ FT 		SQ FT 
Model	Format (in)	Pieces / Box	Lb / Box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
PIXY	2"x6"	78	23.41 lb	5.963 sq ft	75	447.225 sq ft
PIXY ROUNDED EDGE	0.43"x6"	20	0.90 lb	9.678 ft	429	4,151.862 ft

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

Z

COLLECTION