

Z
COLLECTION



10,7x54 cm / 4"x21"
Wall tiles

White Body
5 colours

ALBA


ALBA

"ALBA" is a distinctive piece that transforms your spaces with its unique and elegant design. Its profile features an intricate play of reliefs that adds a special dimension to any environment.

This collection is characterized by its shapes that protrude and recede, generating a visual effect that captures light and shadow in a sophisticated manner, perfectly adapting to a wide range of decorative styles. Perfect for those seeking a detail that elevates the appearance of their spaces

"ALBA" es una pieza distintiva que transforma tus espacios con un diseño único y elegante. Su perfil cuenta con un juego de relieves que añade una dimensión especial a cualquier ambiente.

Esta colección se distingue por sus formas que sobresalen y se hunden, generando un efecto visual que capta la luz y la sombra de manera sofisticada, adaptándose perfectamente a una amplia gama de estilos decorativos. Perfecto para aquellos que buscan un detalle que eleve la apariencia de sus espacios.

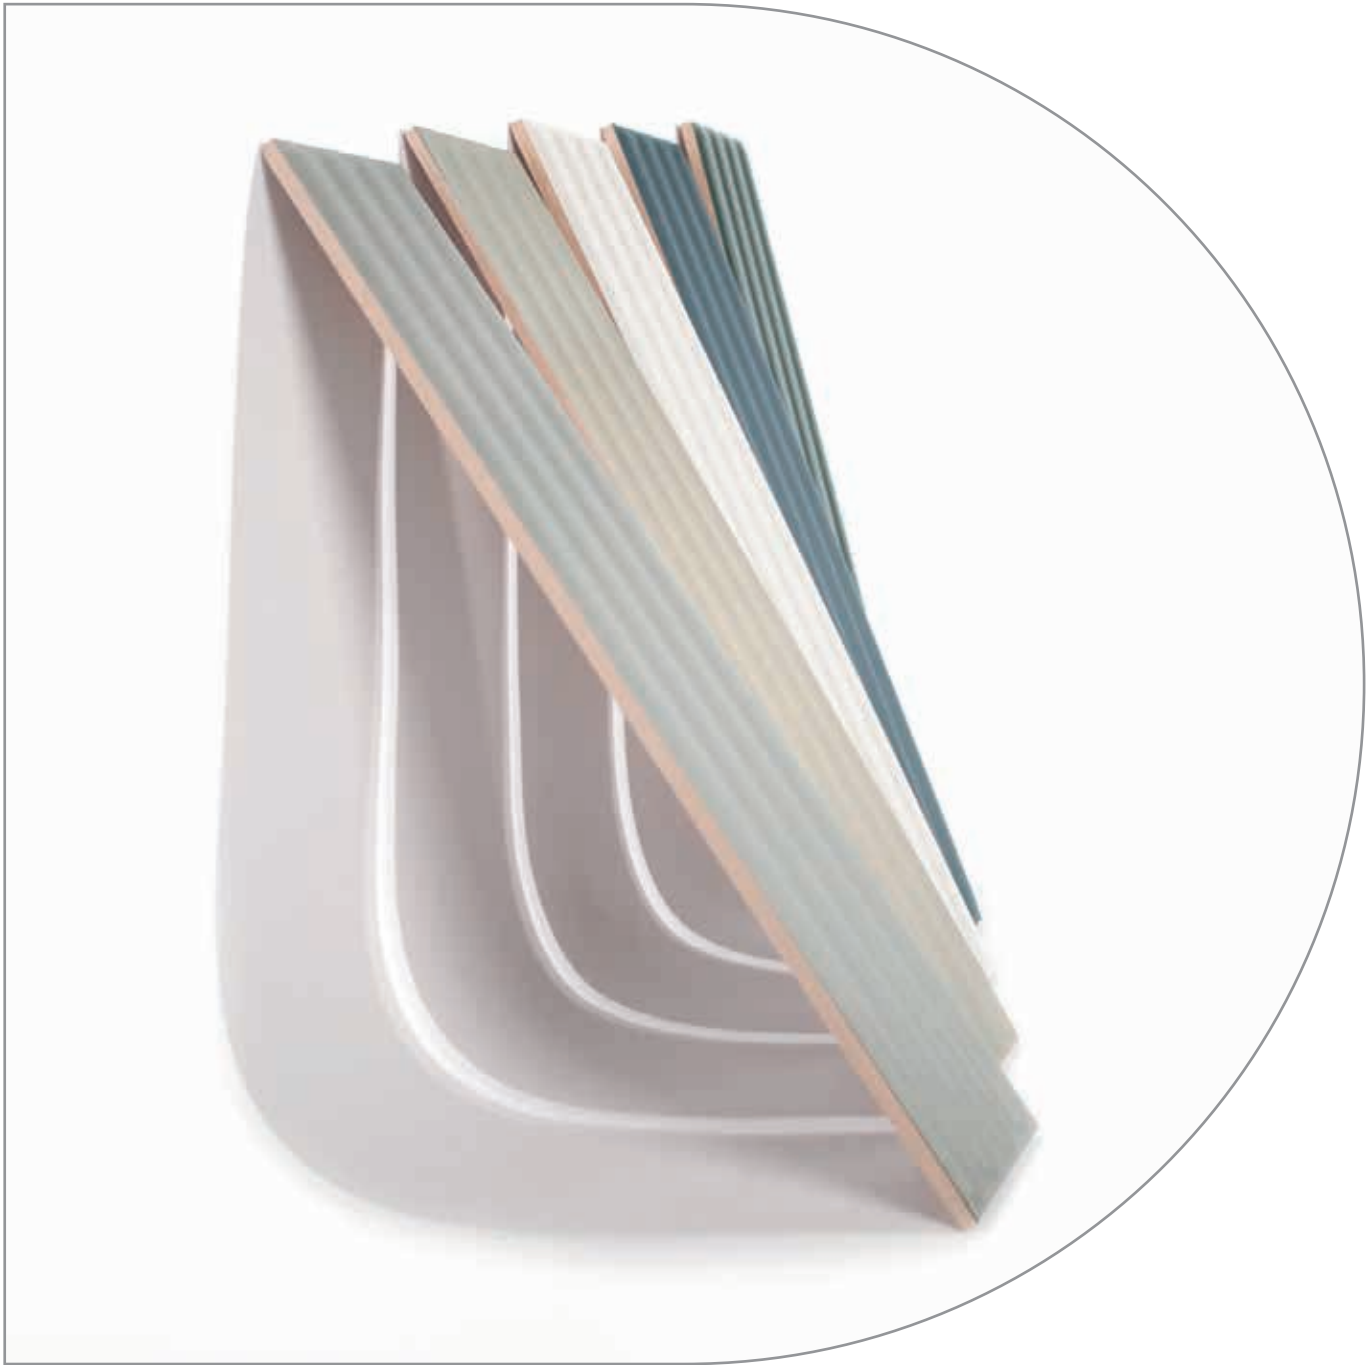

COLLECTION SUMMARY	pag. 4
RESUMEN DE LA COLECCIÓN	

APPLICATIONS	pag. 5
USOS	

GET INSPIRED	pag. 6
INSPIRATE	

TECHNICAL DRAWINGS	pag. 28
DIBUJOS TÉCNICOS	


TECHNICAL FEATURES	pag. 29
CARACTERÍSTICAS TÉCNICAS	

PRICE CODE	pag. 30
CÓDIGO DE TARIFA	

PACKING	pag. 30
---------	---------

RECOMENDATIONS	pag. 31
RECOMENDACIONES	

ALBA 10,7x54,2 cm / 4.2"x21.3" W \$ D12

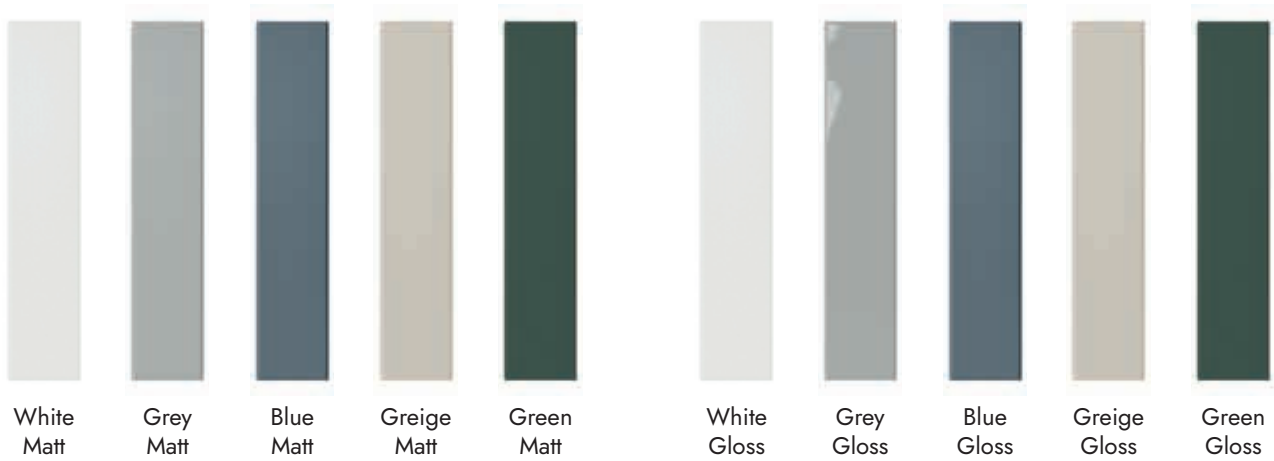

ALBA OUT 10,7x54,2 cm / 4.2"x21.3" W \$ D28



ALBA IN 10,7x54,2 cm / 4.2"x21.3" W \$ D28



Applications - Usos

Indoor / Interior	Outdoor / Exterior	Floor / Pavimento	Wall / Pared	Pool / Piscina	Non-slip / Antislip



ALBA White Gloss & ALBA **Out** Grey Matt





ALBA Out Green Gloss



ALBA Greige Matt & ALBA **Out** Greige Matt



ALBA **In** Greige Matt & ALBA Greige Gloss



ALBA Green Matt & ALBA In Green Matt





ALBA White Matt, ALBA In Blue Matt & ALBA Blue Matt




ALBA Grey Gloss & ALBA In Grey Gloss



ALBA Green Gloss & ALBA In Green Gloss



ALBA Grey Matt - 50% & ALBA In Grey Matt - 50%

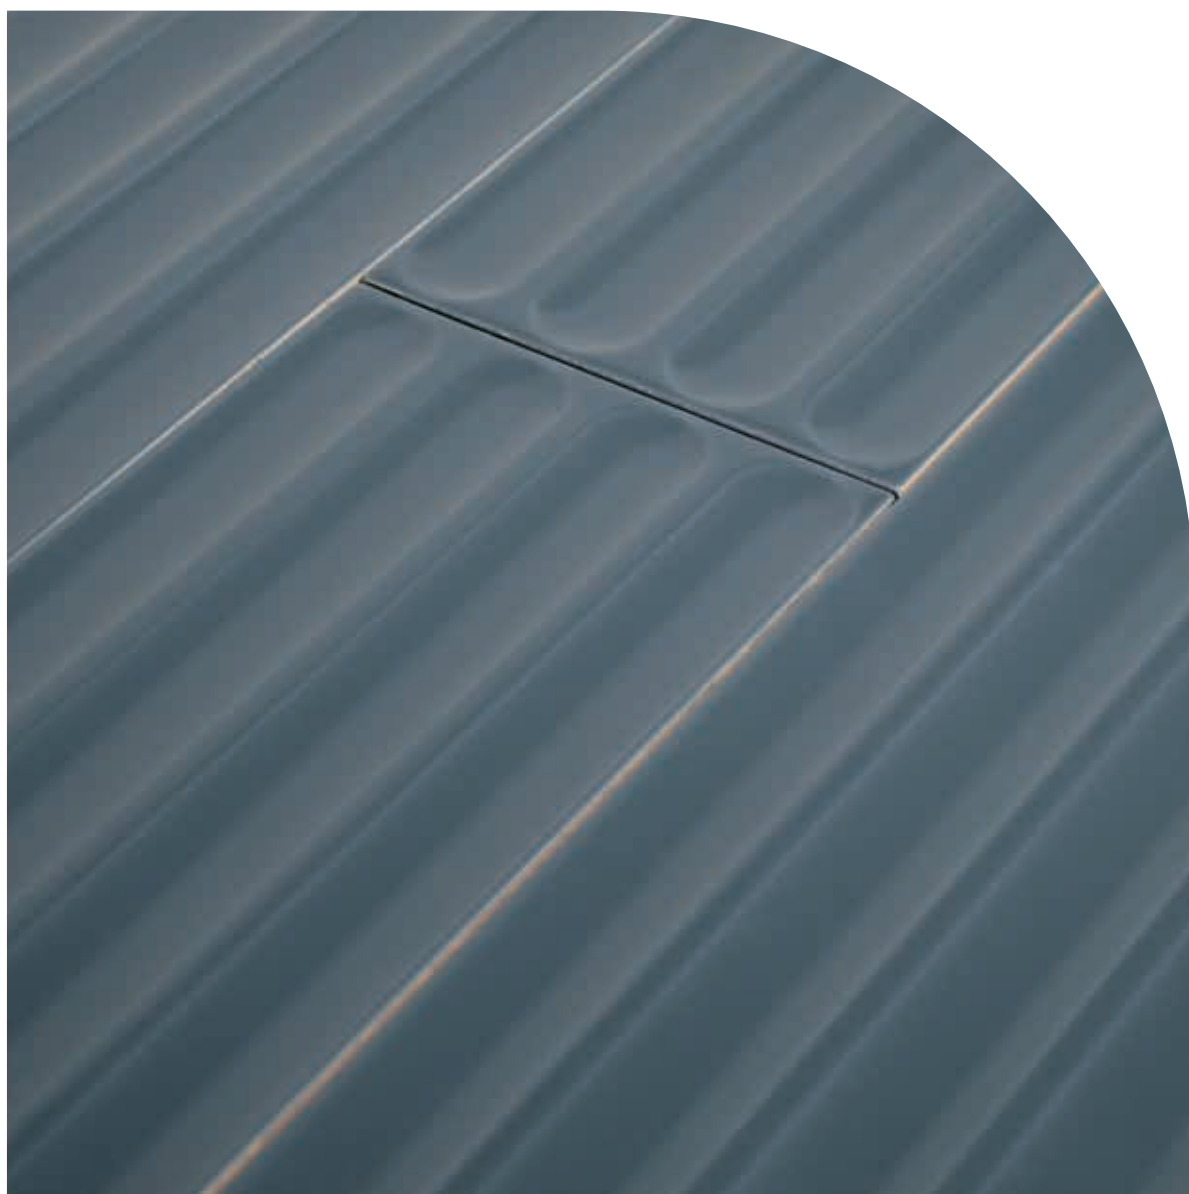

ALBA **In** Blue Gloss & ALBA **Out** Blue Matt

Floor: Graphite Colours (Terrazzo Collection)





ALBA Out White Gloss




ALBA In White Matt



ALBA White Matt & ALBA **Out** White Matt



ALBA **Out** Blue Gloss - 50% & ALBA Blue Gloss - 50%

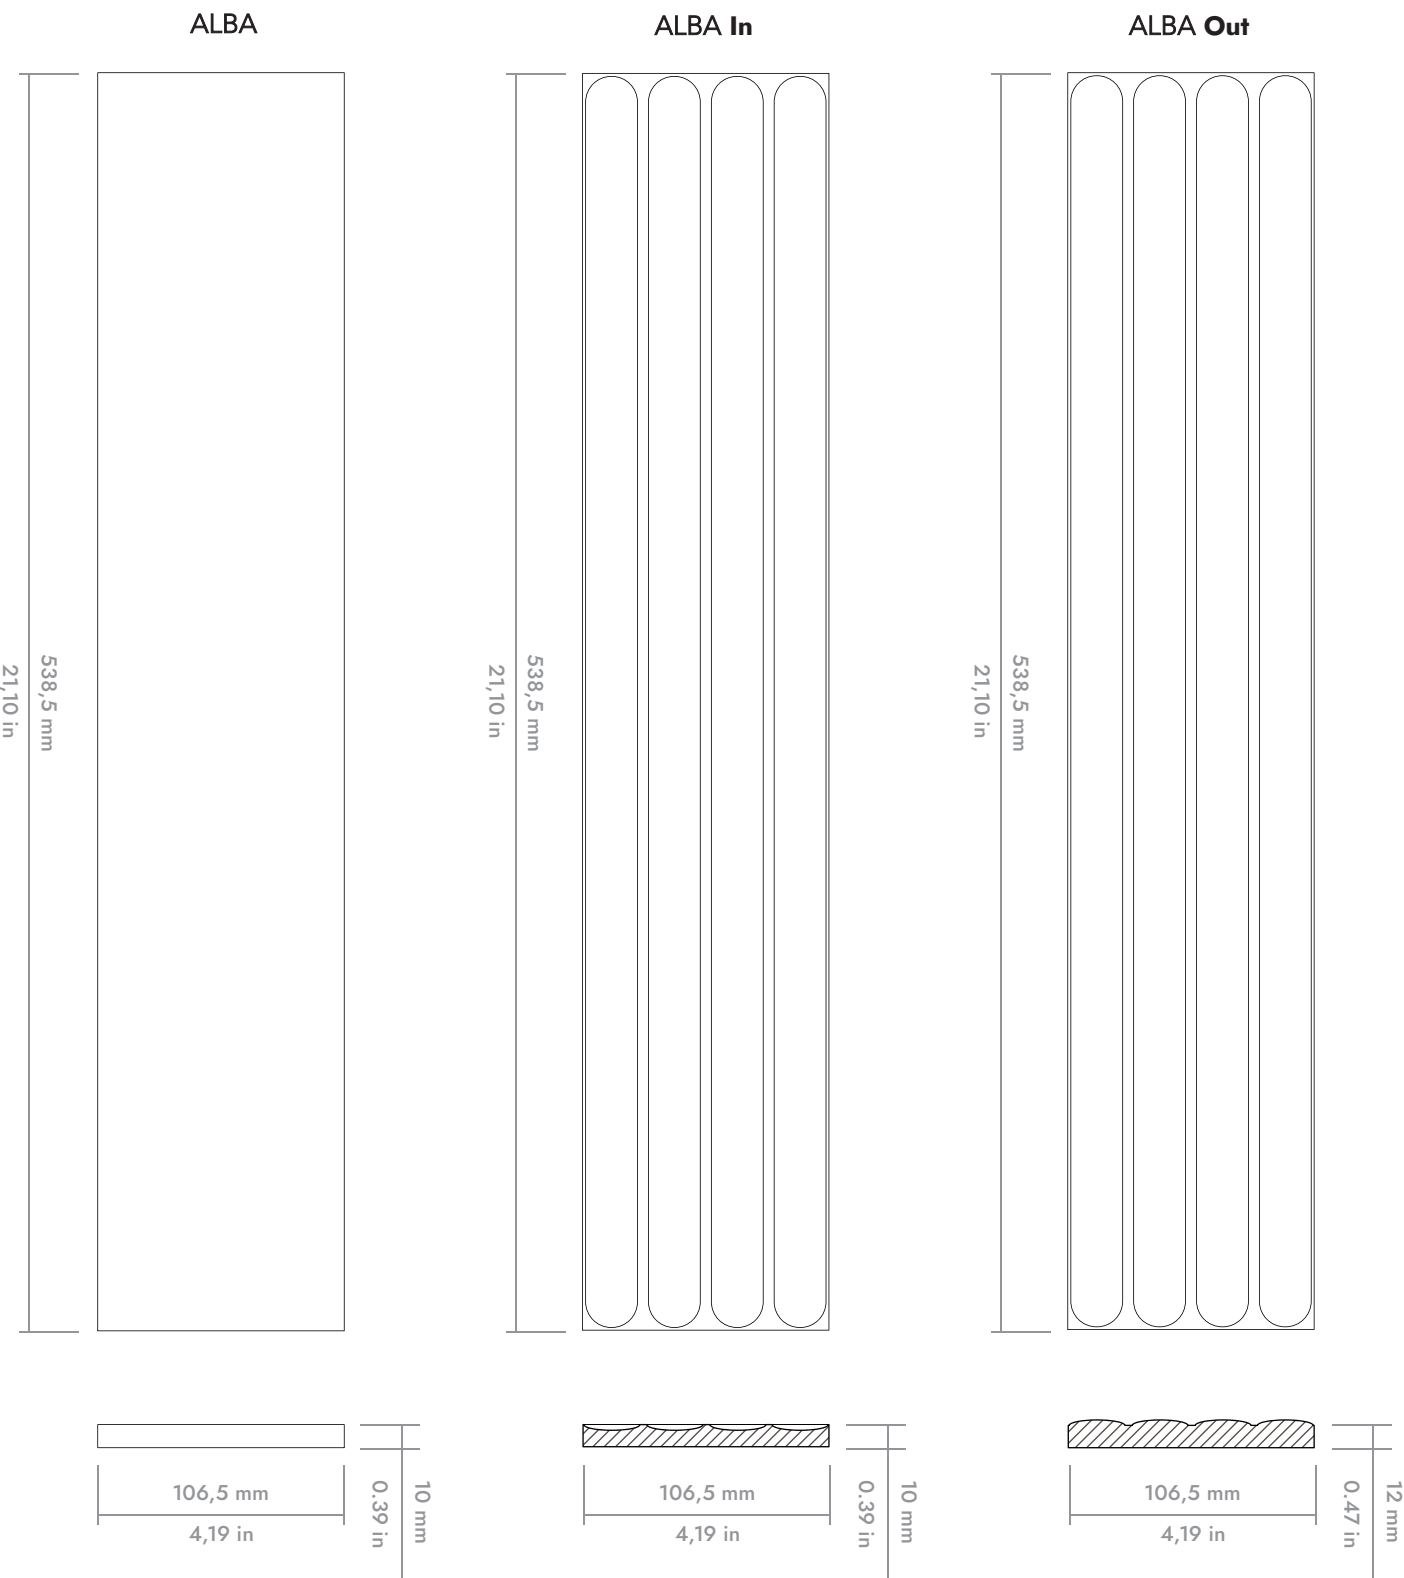

Technical features for Dry-Pressed ceramic tiles with water absorption BIII (Eb >10%) Características técnicas para las baldosas cerámicas prensadas en seco del grupo BIII (Eb >10%)		
FEATURES / CARACTERÍSTICAS	SPECIFICATION / ESPECIFICACIÓN	NORMA
 Dimensional Features	106,5 mm +/- 0,75 mm x 538,5 mm +/- 2mm x 10 mm +/- 0,5mm 106,5 mm +/- 0,75 mm x 538,5 mm +/- 2mm x 10 mm +/- 0,5mm 106,5 mm +/- 0,75 mm x 538,5 mm +/- 2mm x 12,5 mm +/- 0,5mm	UNE-EN ISO 10545-2:2019
 Water absorption	E _b >10%	UNE-EN ISO 10545-3:2018
 Modulus of rupture and breaking strength	Thickness ≥ 7,5 mm mínimo 12 N/mm ² Thickness < 7,5 mm mínimo 15 N/mm ²	UNE-EN ISO 10545-4:2019
 Crazing resistance	Pass	UNE-EN ISO 10545-11:1997
 Household products resistance	GA	UNE-EN ISO 10545-13:2017
 Chemical resistance	GHA	UNE-EN ISO 10545-13:2017
 Stain resistance	>3	UNE-EN ISO 10545-14:2015
 Tone Variation	V1	-
 White Body	-	-

MODEL / MODELO	PRICE CODE / CODIGO TARIFA
ALBA	D12
ALBA IN	D28
ALBA OUT	D28

Packing

			KG 	M2 		M2 
Modelo	Formato (cm)	Piezas / Caja	Kg / Caja	m2 / Caja	Cajas / Palet	m2 / Palet
ALBA	10,7x54,2 cm	10	9,71 kg	0,579 m²	91	52,689 m²
ALBA IN	10,7x54,2 cm	10	8,73 kg	0,579 m²	91	52,689 m²
ALBA OUT	10,7x54,2 cm	10	10,79 kg	0,579 m²	91	52,689 m²

			LB 	SQ FT 		SQ FT 
Model	Format (in)	Pieces / Box	Lb / Box	sq ft / Box	Boxes / Pallet	sq ft / Pallet
ALBA	4.2"x21.3"	10	21,41 lb	6,23 sq ft	91	567,140 sq ft
ALBA IN	4.2"x21.3"	10	19,25 lb	6,23 sq ft	91	567,140 sq ft
ALBA OUT	4.2"x21.3"	10	23,79 lb	6,23 sq ft	91	567,140 sq ft

WAREHOUSING

In order to guarantee the characteristics of the finish the product must be kept in its original packaging until the time of fixing. If the product is likely to be stored for a long period of time it should be suitably covered.

TILE FIXING

To ensure the products adhere correctly to the surface, it is essential to use specific adhesive and grouting material. This must also be suitable for the environment they will have to withstand. Fitting with traditional mortars does not ensure good adhesion.

Due to the nature of the material there may be dimensional variations between pieces. Therefore , all types of joints must be planned and carried out correctly: structural, perimeter, expansion and installation joints. Fitting tiles without joints is not advisable from any technical point of view as this may lead to various problems.

MAINTENANCE AND CLEANING

Once the materials have been fitted, it is advisable to remove any remaining adhesive and grouting material by using a commercial descaling product designed especially, diluted with water . The descaling product must not remain in contact with the surface to be cleaned for more than 5 minutes.

As a general guideline, powder dertergents should not be used, not wire wool or abrasive materials. Generally a sponge will be sufficient with warm water and liquid neutral soap. Then rinse with plenty of clean water.

ALMACENAMIENTO

Para garantizar las características de su acabado, el producto debe mantenerse en su embalaje original hasta el momento de la colocación. Si el producto va a permanecer almacenado durante un largo periodo es conveniente hacerlo bajo cubierta.

COLOCACIÓN

Para garantizar una buena adhesión al soporte es necesaria la utilización de materiales de agarre y de rejuntado adecuados al ambiente al que vayan a estar sometidos. La colocación con morteros tradicionales no garantiza una buena adhesión.

Debido a la naturaleza del material pueden existir diferencias dimensionales entre piezas. Por ello deberán planificarse y ejecutarse correctamente todo tipo de juntas: estructurales, perimetrales, de dilatación y de colocación. La colocación sin juntas es desaconsejable desde cualquier punto de vista técnico, pudiendo ser el origen de diversas patologías.

MANTENIMIENTO Y LIMPIEZA

Finalizada la puesta en obra se recomienda eliminar los restos de materiales de agarre y rejuntado con un desincrustante comercial diseñado expresamente para baldosas cerámicas, rebajado con agua, permaneciendo en contacto con la superficie a limpiar no más de 5 minutos.

Como norma general no deben utilizarse detergentes en polvo ni estropajos metálicos o abrasivos. Generalmente será suficiente con una esponja, agua tibia y un jabón líquido neutro. Posteriormente aclarar con abundante agua limpia.

Z

COLLECTION

zcollection.com

PHOTOGRAPHY

